




## 300U

Forestry mulcher for special built hydraulic or PTO driven Prime Movers with power range between 200 and 400 HP.

**Standard equipment:** hydraulic hood, adjustable skids.

**Options:** customized hydraulic or PTO transmission, pushing frame, hydraulic pushing frame, customized attachment plate, teeth on hydraulic hood.

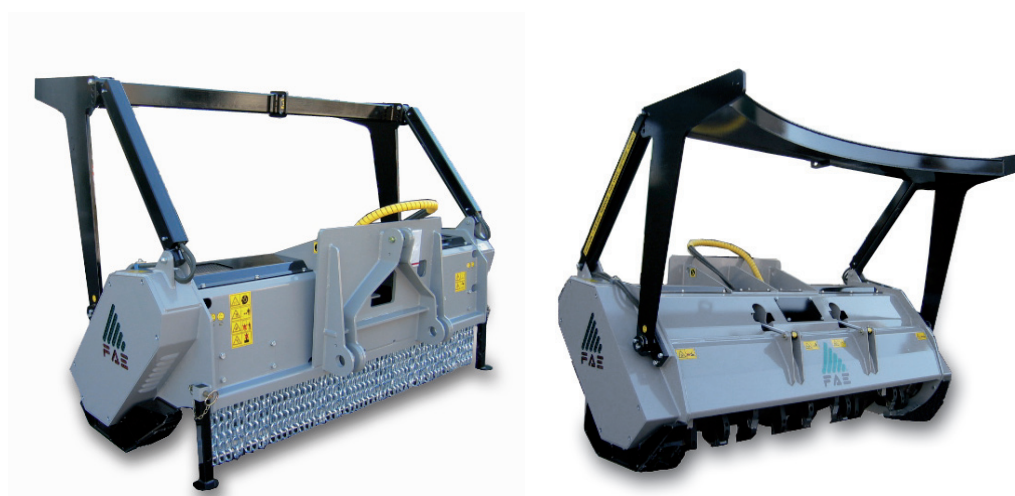

## 300U

Model	Requirements			Working width mm	Overall width mm	Weight Kg rotor type C	Weight Kg rotor type B	Grinding diameter mm (max)	Teeth q.ty	
	Power HP Min - Max	Flow L/min Min - Max	Pressure Bar Min - Max						type B+C/SD	type C+C/SD
300/U - 200	200 - 400	380 - 570	250 - 350	2030	2495	2580	2890	400	80+2	44+2
300/U - 225	200 - 400	380 - 570	250 - 350	2270	2735	2670	2970	400	88+2	50+2
300/U - 250	200 - 400	380 - 570	250 - 350	2510	2975	2760	3080	400	102+2	56+2

The weight refers to the machine without options. Technical datas for models with mechanical transmission upon request.



Rotor Type 300U "B"



Tooth type B



Tooth type C/SD



Rotor Type 300U "C"



Tooth type C



Tooth type C/SD