




PMM/SSL

Brush mulcher for skid steer loaders between 60 and 130 HP.

Standard equipment: hydraulic gear type motor (from 32 to 65 cc) with double relief valve with anticavitation and brake function and variable displacement for high and low flow usage, skid steer loader type quick attachment plate with self levelling device, self cleaning rear roller with integrated skids, anti-projection flaps, adjustable rear hood, Hardox steel counter blades, hydraulic hoses, possibility to have the rotor equipped with heavy duty hammers or with "Y" flails.

Options: oversized roller supports for heavy duty application.

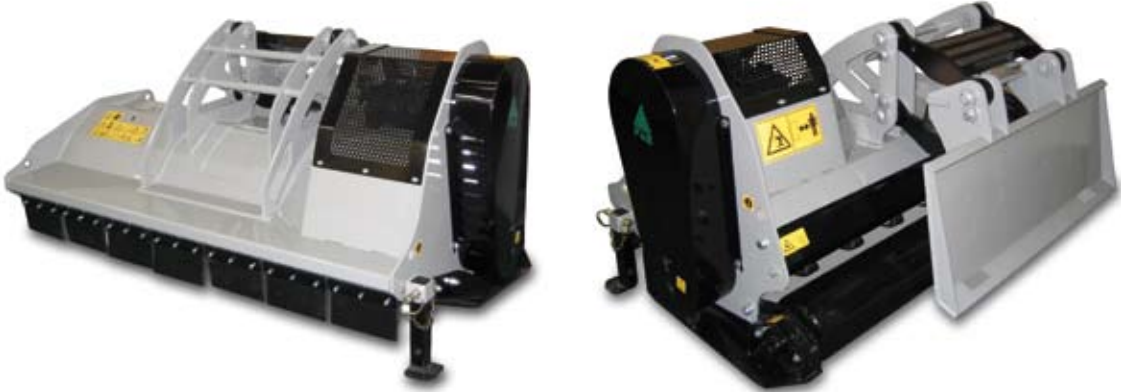

PMM/SSL

Model	Power HP Min - Max	Requirements		Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Teeth q.ty	
		Flow L/min Min - Max	Pressure Bar Min - Max					hammers PMM	flails Y
PMM/SSL 150	60 - 130	60 - 120	180 - 250	1480	1740	790	80	18	18
PMM/SSL 175	65 - 130	60 - 120	180 - 250	1720	1980	850	80	21	21
PMM/SSL 200	70 - 130	60 - 120	180 - 250	1960	2220	910	80	24	24

The data refers to the machine without options.



Rotor with PMM/SSL hammers



Hammer PMM



Rotor with "Y" flails



Flail "Y"