




## STCH/R - STCH/R/SD

Stone crushers for road construction for tractors between 180 and 300 HP with a max working depth of 15 cm.

**Standard equipment:** double side transmission, PTO drive shaft with cam clutch, gearbox with freewheel, adjustable skids, hydraulic rear hood, dosing blade mounted on the rear hood, adjustable counter knives. In addition, for the **STCH/R/SD** model: inner plates in Hardox steel, skids with replaceable Hardox sole, ploughshares made of special steel, adjustable three point linkage.

**Options:** grader blade, hydraulic top link.

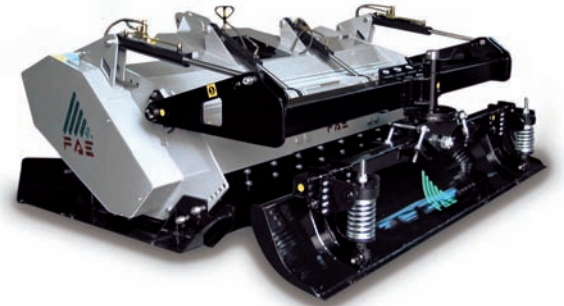


### STCH/R

Model	Tractor HP		PTO rpm	Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Working depth mm (max)	Teeth q.ty/type STC+STC/SD
	Min	Max							
STCH/R 200	180	300	1000	2000	2550	4370	500	150	46STC+4STC/SD
STCH/R 225	200	300	1000	2240	2790	4620	500	150	52STC+4STC/SD
STCH/R 250	220	300	1000	2480	3030	4850	500	150	58STC+4STC/SD

### STCH/R/SD

Model	Tractor HP		PTO rpm	Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Working depth mm (max)	Teeth q.ty/type STC+STC/SD
	Min	Max							
STCH/R/SD 200	180	300	1000	2000	2550	4530	500	150	46STC+4STC/SD
STCH/R/SD 225	200	300	1000	2240	2790	4870	500	150	52STC+4STC/SD
STCH/R/SD 250	220	300	1000	2480	3030	5220	500	150	58STC+4STC/SD

The weight refers to the machine without options.



Rotor type STCH



Tooth type STC



Tooth type STC/SD