




## STCH - STCH/SD

Stone crushers for tractors between 180 and 300 HP with a max working depth of 40 cm.

**Standard equipment:** double side transmission, PTO drive shaft with cam clutch, gearbox with freewheel, adjustable skids with interchangeable ploughshare and skid shoe, hydraulic rear hood, adjustable counter knives. In addition, for the **STCH/R/SD** model: inner plates in Hardox steel, adjustable three point linkage.

**Options:** dosing blade, road Kit, hydraulic top link

**Notes:** For their correct usage, a creeper gear transmission is recommended.

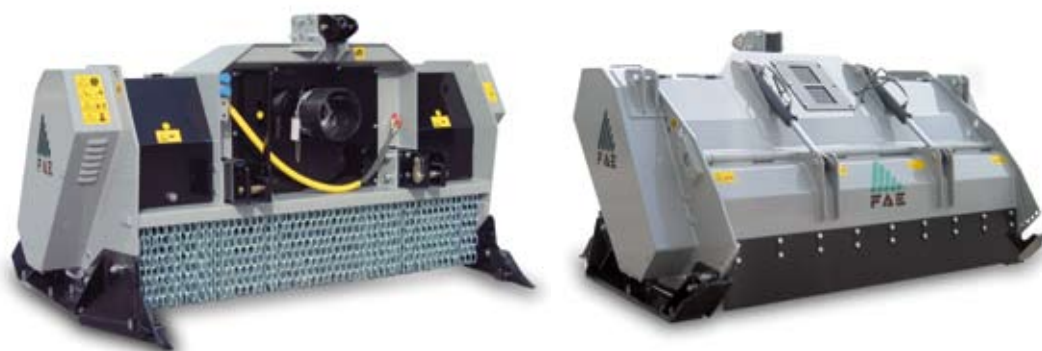

### STCH

Model	Tractor HP		PTO rpm	Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Working depth mm (max)	Teeth q.ty/type STC+STC/SD
	Min	Max							
STCH 200	180	280	1000	2000	2550	4300	500	400	46STC+4STC/SD
STCH 225	200	280	1000	2240	2790	4540	500	400	52STC+4STC/SD
STCH 250	220	280	1000	2480	3030	4780	500	400	58STC+4STC/SD

### STCH/SD

Model	Tractor HP		PTO rpm	Working width mm	Overall width mm	Weight Kg	Grinding diameter mm (max)	Working depth mm (max)	Teeth q.ty/type STC+STC/SD
	Min	Max							
STCH-SD 200	180	300	1000	2000	2550	4440	500	400	46STC+4STC/SD
STCH-SD 225	200	300	1000	2240	2790	4770	500	400	52STC+4STC/SD
STCH-SD 250	220	300	1000	2480	3030	5200	500	400	58STC+4STC/SD

The data refers to the machine without options.



Rotor type STCH



Tooth type STCH



Tooth type STCH/SD