


## STC/R/HP

Stone crushers for road construction for tractors between 100 and 220 HP with a max working depth of 10 cm.

**Standard equipment:** double side transmission, PTO drive shaft with cam clutch, gearbox with free wheel, adjustable skirts, hydraulic rear hood, dosing blade mounted on the rear hood, adjustable counter knives.


**Options:** grader blade, hydraulic top link.

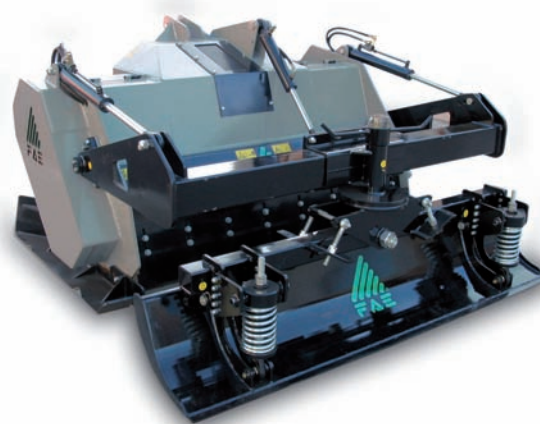

### STC/R/HP

| Model        | Tractor HP |     | PTO rpm | Working width mm | Overall width mm | Weight Kg | Grinding diameter mm (max) | Working depth mm (max) | Teeth q.ty/type<br>STC+STC/SD |
|--------------|------------|-----|---------|------------------|------------------|-----------|----------------------------|------------------------|-------------------------------|
|              | Min        | Max |         |                  |                  |           |                            |                        |                               |
| STC/R/HP 150 | 100        | 220 | 1000    | 1480             | 2015             | 2510      | 300                        | 100                    | 32STC+4STC/SD                 |
| STC/R/HP 175 | 120        | 220 | 1000    | 1720             | 2255             | 2770      | 300                        | 100                    | 38STC+4STC/SD                 |
| STC/R/HP 200 | 130        | 220 | 1000    | 1960             | 2495             | 2910      | 300                        | 100                    | 42STC+4STC/SD                 |

*The weight refers to the machine without options.*

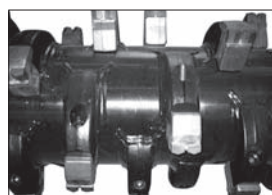

Rotor type STC



Tooth type STC



Tooth type STC/SD